


# SCANLIFE™

## Q600


Mobile Label Printer



### Key features

- Support direct USB charging;
- 50mm diameter paper roll
- OLED screen available;
- TSPL, EPL, ZPL, DPL, CPCL, ESC/POS command compatible.

### Applications

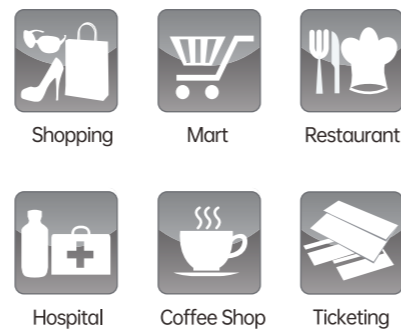

# Q600

## Mobile Label Printer



|                                   |   |
|-----------------------------------|---|
| <b>Printing</b>                   | Q600  |
| Resolution                        | 203 DPI   |
| Printing method                   | Direct Thermal  |
| Print speed                       | 70mm (2.7") / s   |
| Print width                       | 72 mm (2.8")  |
| Print length                      | 1778 mm (70")   |
| <b>Media</b>                      |   |
| Media type                        | Continuous, gap, black mark   |
| Media width                       | 25.4 mm ~ 76 mm   |
| Media thickness                   | 0.06 mm ~0.16 mm  |
| <b>Performance Features</b>       |   |
| Processor                         | 32-bit CPU  |
| Memory                            | 8MB Flash Memory/ 8MB SDRAM   |
| Interface                         | Standard version: USB+Bluetooth Optional:USB+WIFI   |
| Screen                            | OLED (0.96") Resolution:128*64 pix  |
| Sensors                           | ①Gap sensor ②Cover opening sensor ③Black mark sensor  |
| <b>Fonts/Graphics/Symbologies</b> |   |
| Internal fonts                    | 8 alpha-numeric bitmap fonts, Windows fonts are downloadable from software.   |
| 1D bar code                       | Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on,MSI, PLESSEY, POSTNET, China POST |
| 2D bar code                       | PDF-417, Maxicode, DataMatrix, QR code  |
| Rotation                          | 0°, 90°, 180°, 270°   |
| Emulation                         | TSPL, EPL, ZPL, DPL, CPCL, ESC/POS  |
| <b>Physical Features</b>          |   |
| Dimensions                        | 120×112×60mm (D×W×H)  |
| Weight                            | 400 g   |
| <b>Reliability</b>                |   |
| Printer head life                 | 30Km  |
| <b>Software</b>                   |   |
| Operation system                  | Windows / Android / iOS   |
| SDK                               | Windows / Android / iOS   |
| <b>Power supply</b>               |   |
| USB                               | DC 5V/2A  |
| Battery                           | 2500mAh   |
| <b>Environmental Conditions</b>   |   |
| Operation environment             | 5 ~ 40°C (41~104°F) , Humidity: 25 ~ 85% no condensing  |
| Storage environment               | -40 ~ 60°C (-40~140°F) , Humidity: 10 ~ 90% no condensing   |

